


Tweeter Type: Titanium Dome  
 Nominal Diameter: 1"/25 mm  
 Woofer Type: Carbon Fiber Cone  
 Nominal Diameter: 4"/100 mm  
 Nominal Impedance (Znom): 4 Ohms  
 Continuous Power Handling: 40 W  
 Peak Power Handling: 80 W  
 Frequency Response: 120 Hz – 20 KHz

### TWEETER PARAMETERS

Magnet: N38 Neodymium  
 Voice Coil Diameter: 25 mm  
 Voice Coil Resistance (Re): 3.6 Ohms  
 Sensitivity: 91.0 dB @ 1W/1m  
               94.0 dB @ 2.83V/1m  
 Crossover: 6 dB/Oct.

### WOOFER PARAMETERS

Magnet: N50H/N42 Neodymium  
 Voice Coil Resistance (Re): 3.2 Ohms  
 Sensitivity: 88.0 dB @ 1W/1m  
               91.0 dB @ 2.83V/1m  
 Free Air Resonance (Fs): 137.4 Hz  
 Reference Efficiency (no): 0.352%  
 Electrical "Q" (Qes): 0.649  
 Mechanical "Q" (Qms): 4.380  
 Total Speaker "Q" (Qts): 0.565  
 Equivalent Compliance (Vas): 0.911 lt  
 Moving Mass (Mms): 6.420 g  
 Mech. Compliance (Cms): 0.21 mm/N  
 Magnetic Strength (BL): 5.229 N/A  
 Effective Piston Area (Sd): 55.42 sq. cm

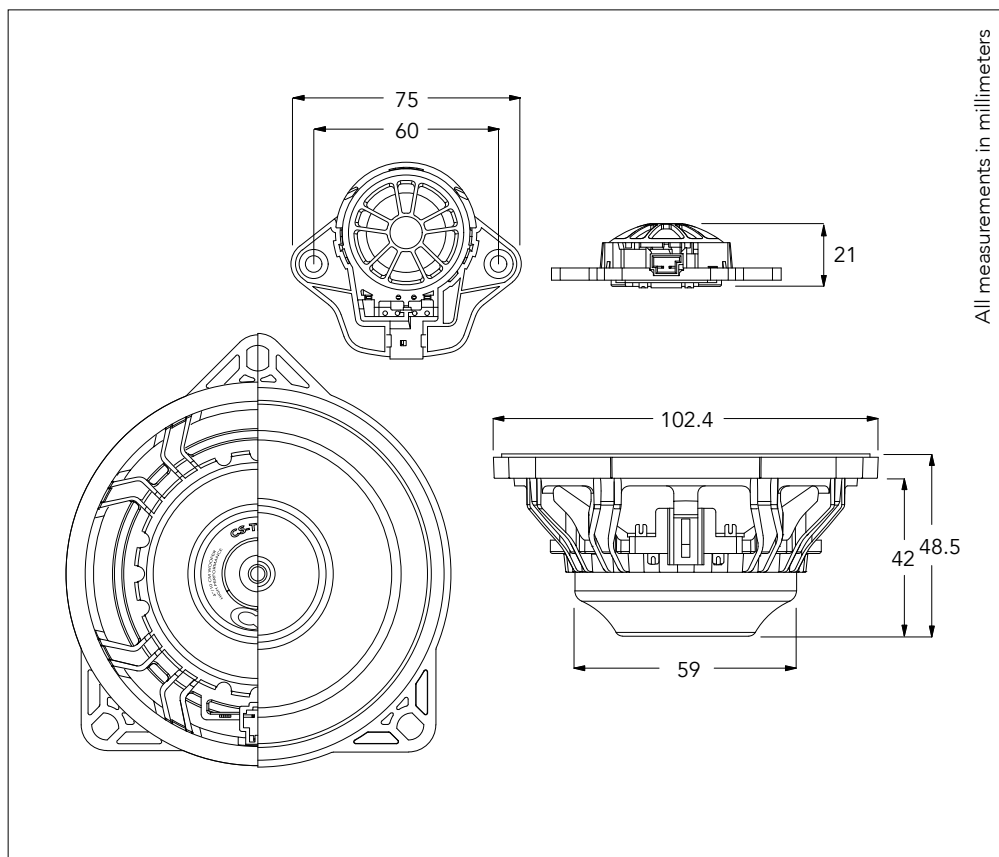

### Compatibility

TESLA Model 3  
 TESLA Model Y