




### Technical Specifications

|                            |                    |
|----------------------------|--------------------|
| ▶ <b>Type:</b>             | Subwoofer - 250 mm |
| <b>Nominal Impedance:</b>  | 4 + 4 Ohm          |
| <b>Power RMS:</b>          | 1000 Watt          |
| <b>Max Power:</b>          | 2000 Watt          |
| <b>Frequency Response:</b> | 26 Hz ~ 330 Hz     |
| <b>Sensitivity:</b>        | 87,1 dB 1W/1m      |

### ▶ Frequency Response (1W/1m)

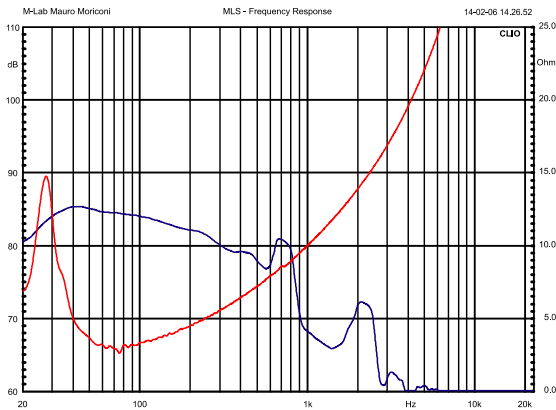

— Frequency Response  
— Impedance Curve

### T & S Parameters

|               |                     |
|---------------|---------------------|
| ▶ <b>Re:</b>  | 1.43 Ohm            |
| <b>Fs:</b>    | 27.45 Hz            |
| <b>Qms:</b>   | 2.19                |
| <b>Qts:</b>   | 0.38                |
| <b>Qes:</b>   | 0.47                |
| <b>Mms:</b>   | 214 g.              |
| <b>Cms:</b>   | 0.157 mm/N          |
| <b>Sd:</b>    | 398 cm <sup>2</sup> |
| <b>VAS:</b>   | 35.3 L.             |
| <b>Le:</b>    | 1.407 mH            |
| <b>BxL:</b>   | 22.02 (serie) T/m   |
| <b>X max:</b> | 22 mm               |

