


Speaker Type: Component Subwoofer
 Nominal Diameter: 10"/250 mm
 Nominal Impedance (Znom): 4 Ohm
 Continuous Power Handling: 250 W
 Peak Power Handling: 500 W
 Rec. Amplifier Power: 100 - 250W (RMS)

PARAMETERS

Voice Coil Resistance (Re): 3.6 Ohms
 Voice Coil Diameter: 2.1"/53 mm
 Free Air Resonance (Fs): 32.9 Hz
 Electrical "Q" (Qes): 0.67
 Mechanical "Q" (Qms): 6.57
 Total Speaker "Q" (Qts): 0.61
 Equivalent Compliance (Vas): 25.3 lt
 Moving Mass (Mms): 138.6 g
 Mech. Resistance (Kg/s): 4.4
 Magnetic Strength (BL): 12.4 N/A
 Effective Piston Area (Sd): 323.7 sq. cm
 VC Inductance (@1KHz): 1.4 mH
 Excursion (X Max): 6.5 mm

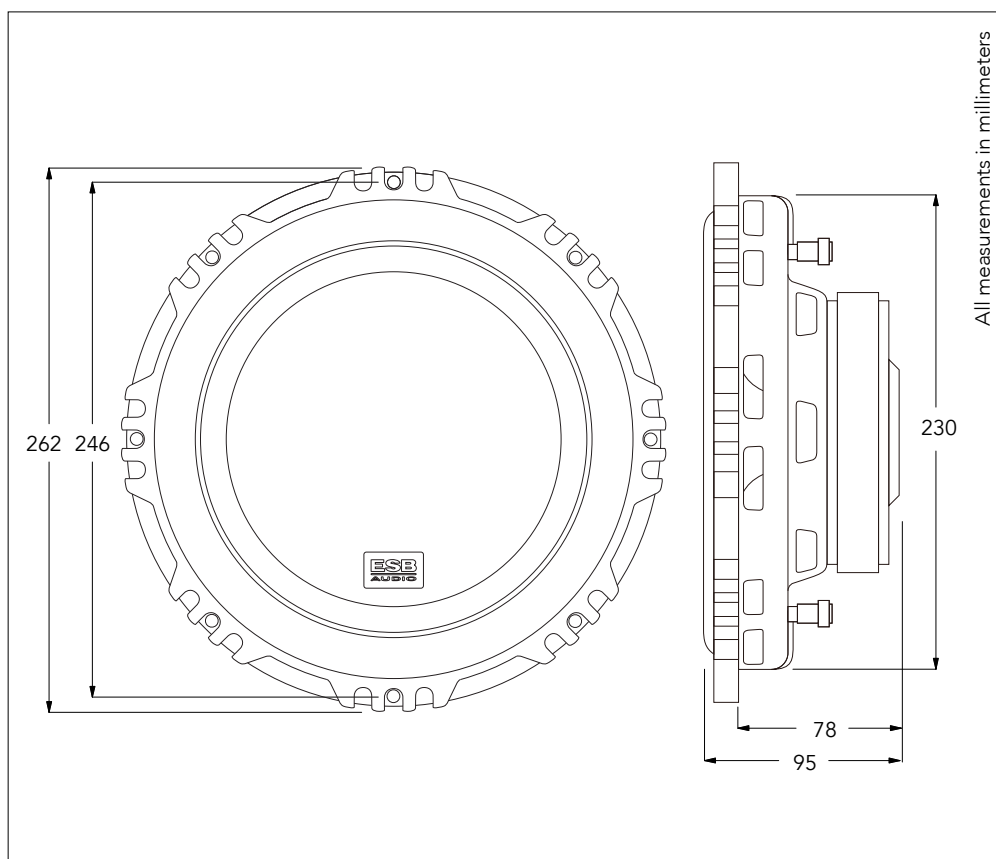

RECOMMENDED COMPACT SEALED ENCLOSURE

Net Volume:
 0.78 ft³ / 22 lit.
 External Dimensions:
 750 (L) × 400 (H) × 125 (W) mm
 Material Thickness:
 0.7" / 18 mm minimum
 Add acoustic damping material to
 approximately 75% of the inner surface.

RECOMMENDED SOUND QUALITY SEALED ENCLOSURE

Net Volume:
 0.95 ft³ / 27 lit.
 External Dimensions:
 750 (L) × 400 (H) × 145 (W) mm
 Material Thickness:
 0.7" / 18 mm minimum
 Add acoustic damping material to
 approximately 75% of the inner surface.

