


Tweeter Type: Titanium Dome
 Nominal Diameter: 1"/25 mm
 Woofer Type: Carbon/Kevlar Cone
 Nominal Diameter: 4"/100 mm
 Nominal Impedance (Znom): 4 Ohms
 Continuous Power Handling: 40 W
 Peak Power Handling: 80 W
 Frequency Response: 120 Hz – 20 KHz

TWEETER PARAMETERS

Magnet: N38 Neodymium
 Voice Coil Diameter: 25 mm
 Voice Coil Resistance (Re): 3.6 Ohms
 Sensitivity: 91.0 dB @ 1W/1m
 94.0 dB @ 2.83V/1m
 Crossover: 6 dB/Oct.

WOOFER PARAMETERS

Magnet: N50H/N42 Neodymium
 Voice Coil Resistance (Re): 3.2 Ohms
 Sensitivity: 88.0 dB @ 1W/1m
 91.0 dB @ 2.83V/1m
 Free Air Resonance (Fs): 137.4 Hz
 Reference Efficiency (no): 0.352%
 Electrical "Q" (Qes): 0.649
 Mechanical "Q" (Qms): 4.380
 Total Speaker "Q" (Qts): 0.565
 Equivalent Compliance (Vas): 0.911 lt
 Moving Mass (Mms): 6.420 g
 Mech. Compliance (Cms): 0.21 mm/N
 Magnetic Strength (BL): 5.229 N/A
 Effective Piston Area (Sd): 55.42 sq. cm

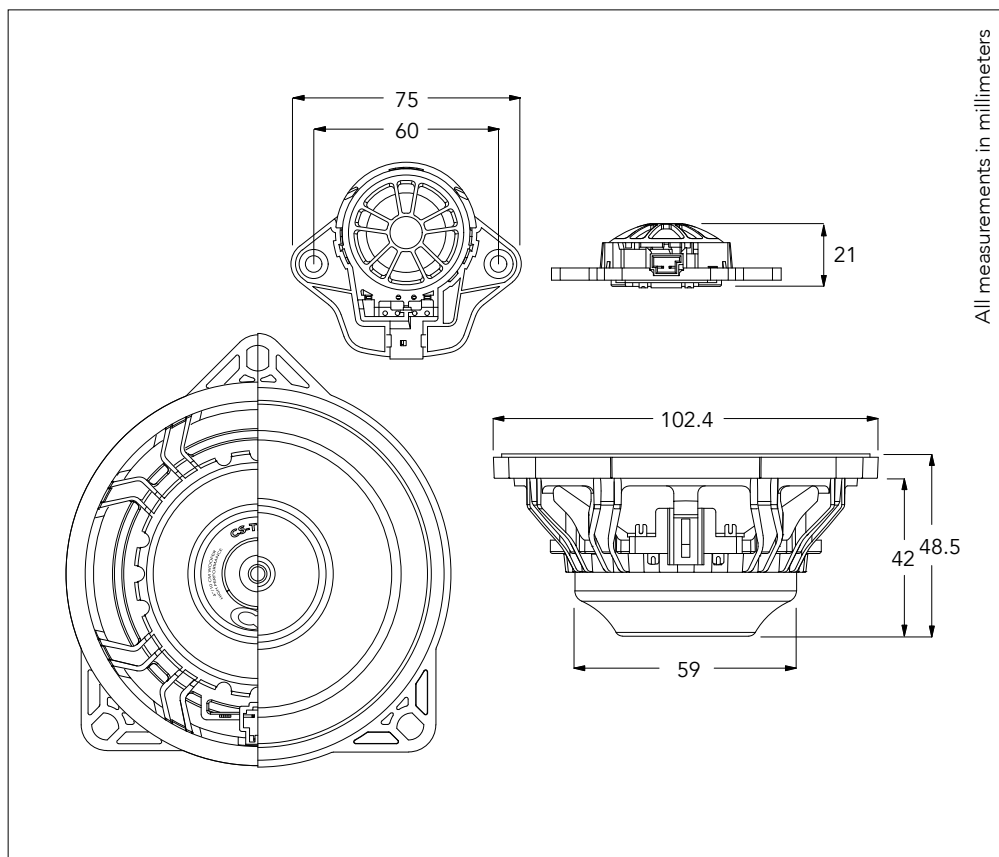

Compatibility

TESLA Model 3
 TESLA Model Y