



Technical Specifications


▶ Type:	Mid-Low - 165 mm
Nominal Impedance:	4 Ohm
Power RMS:	100 Watt
Max Power:	160 Watt
Frequency Response:	49 Hz ~ 2.2 KHz
Sensitivity:	87 dB 1W/1m

T & S Parameters

▶ Re:	3.31 Ohm
Fs:	56.29 Hz
Qms:	3.47
Qts:	0.53
Qes:	0.63
Mms:	18.34 g.
Cms:	0.0435 mm/N
Sd:	136 cm ²
VAS:	11.22 L.
Le:	0.77 mH
BxL:	10.8 T/m
X max:	5 mm

Working volume: from 4 to 10 liters sealed enclosure

Frequency response 1W/1m

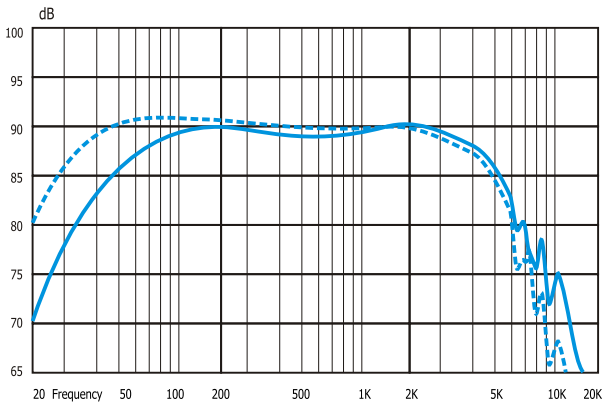

Impedance Curve (Free-air)

